




**SCHÜTZE-SCHUHE** GmbH & Co.KG  
Pregartener Straße 15  
4284 Tragwein, **Austria**

phone: +43 7263 88 323  
fax: +43 7263 88 323 7  
e-mail: [office@schuetze-schuhe.at](mailto:office@schuetze-schuhe.at)  
web: [www.schuetze-schuhe.at](http://www.schuetze-schuhe.at)

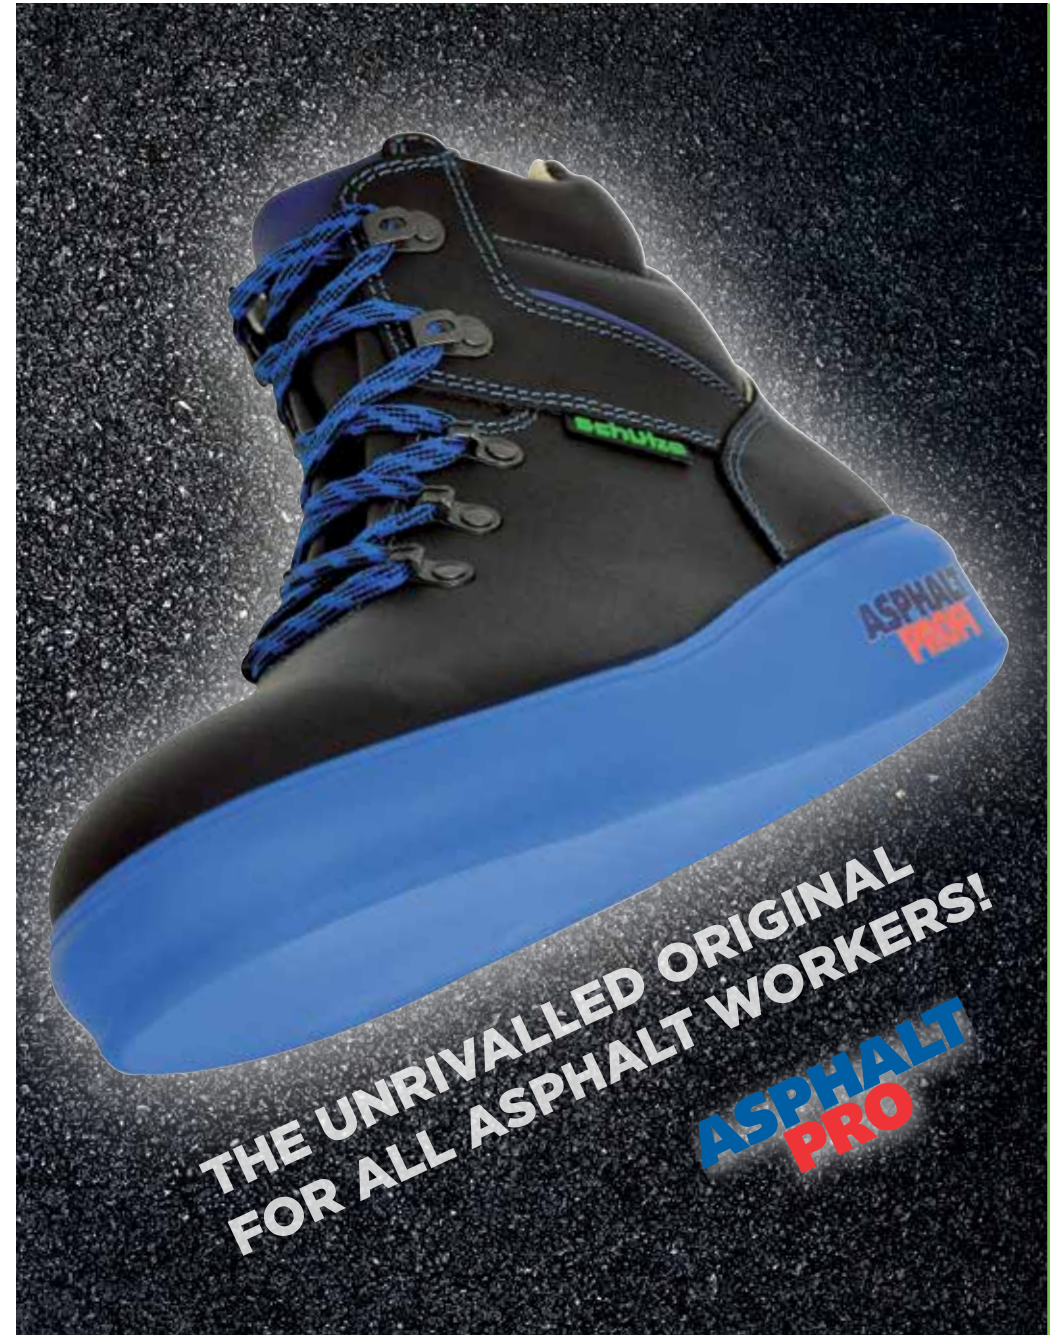

**THE UNRIVALLED ORIGINAL  
FOR ALL ASPHALT WORKERS!**  
**ASPHALT  
PRO**

SAFETY WITH COMFORT

## THE SOLUTION FOR WORK ON HOT SURFACES



The only safety shoe that earns money.  
**WHY?**

The answer is quite simple:

**SCHÜTZE ASPHALT-PRO** is the only shoe enabling your employees to work on hot asphalt for more than an hour without putting their health and/or safety at risk.

**DO YOU KNOW ANOTHER ONE?**



### SCHÜTZE WATER-PROTECTOR- LEATHER

satisfies more than the standard requires. Water, oil and dirt resistant.

**Light weight**  
Prevents fatigue of the musculoskeletal system



**High mould**  
Protects feet and leather from asphalt contamination

**No profile**  
Enables easy removal of asphalt from the sole

**High insulation**  
Guarantees long durability under extensive requirement (160°C) without burning feet

### High durability and longevity

This special shoe features a specific lavish design in order to resist high mechanic and thermal stress.

### Excellent roll and flexure properties

Provide for effortless and comfortable walking

**No heel**  
avoids unwanted heel marks in the asphalt

**3M Scotchlite**  
Reflecting material

**No lateral profile**  
Facilitates the cleaning of the shoes

**Name:** S-PRO A6200

**Order number:** 6232  
**Norm:** EN ISO 20345:2011

**Protective function:** S2  
HI-CI-HRO



**Name:** S-PRO A6400

**Order number:** 6432  
**Norm:** EN ISO 20345:2011

**Protective function:** S2  
HI-CI-HRO



### Features:



### Description:

**Upper leather:** water, oil & dirt resistant genuine leather in special quality, thickness approx. 2.1 mm  
**Lining leather:** natural, perforated orthopaedic leather lining, thickness from 1.0 to 1.4 mm  
**Toe-protection cap:** high & wide FreeToes toe cap in steel, with flexible transition lip  
**Cushion:** replaceable cushion inlay with spherical heel and distinct arch support  
**Insole:** genuine leather, herbal tanned, thickness from 2.4 - 2.7 mm  
**Sole:** DUO-SOFT ASPHALT sole (rubber-PUR)  
 SEALING SOLE EDGE SYSTEM patent nr. 403677  
 nitrile rubber mould (slip-, microbe- and acid resistant, oil- and fuel resistant)  
 polyurethane foam body (lightweight, shock absorbent, permanently elastic)  
 well insulated with special heat resistant fibre material  
 heat and cold insulated according to EN ISO 20345:2011 (HI-CI)  
 contact heat resistant up to 300°C according to EN ISO 20345:2011 (HRO)

**Sizes:** 40 - 47